

EVORA A801



CIR-A801 recessed kit

CIR-A801 legend panel



CIR-A801 silk print diffuser



Suitable for all CIR-A801 Series

Description

- Polycarbonate for complete body
- SMT LED technology
- IP65 polycarbonate housing and opal diffuser
- Maintained and non-maintained option
- Easy installation and maintenance
- Perfect replacement for T5 8W
- Supplied with a legend panels to create a double-sided exit sign.
- Test button available
- Ideal for use in corridors exits and escape routes
- Working temperature : -5~40 C
- 24 hours charge time



12L



30L



51L

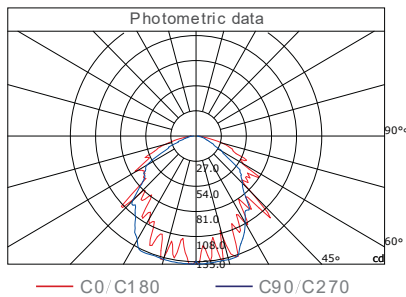

Specification

Model	Wattage	SMD LED	Lumen	Ni-Cd Battery	Duration	Mode
CIR-A801S/12L	3W	12pcs SMD LED	130lm	3.6V 1500mAh	3h	M/NM
CIR-A801/30L	4W	30pcs SMD LED	190lm	3.6V 1800mAh	3h	M/NM
CIR-A801/51L	7W	51pcs SMD LED	300lm	4.8V 1800mAh	3h	M/NM

Self adhesive legends



A1

A2

A3

A4