




Description:

A variation of low glare LED panels, ideal for multifunctional areas in offices and commercial buildings. The diffuser offers complete uniformity for ambient lighting. The fixture can be ceiling mounted or recessed.

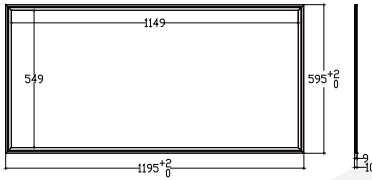

Item Code:	CIR-LM1206-60W
Product Type:	Slim panel light
Main Material:	Aluminum frame and pmma diffuser
Finishing	Powder coated
Color:	White
Adjustable:	No
Input:	220-240VAC
Light source:	LED
Power(W):	60W
Output Lumen(lm):	6000lm
CCT(K)	3000K 4000K 6000K
CRI:	80+
Beam Angle(°):	120°
UGR:	<22
Dimmable:	No
Dimensions(mm):	1195*595*10mm
Installation	Ceiling recessed
Cutout(mm):	NA
Safety Class:	Class II
IP Rating:	IP20
Options:	-TRIAC: Phase cut dimming -0-10V: 0-10V dimming -DALI: DALI dimming +EK3: emergency kit 3h +EK1.5: emergency kit 1.5h